

## CW-WZ-0155

### 2.4G/5.8G External Antenna

#### Key Features

Frequency: 2400-2500/5150-5850MHz

SMA Male Connector

Dimensions: 30\*8.1mm




## 1. Antenna Electrical Characteristics

Band (MHz)	
Frequency (MHz)	2400-2500/5150-5850MHz
VSWR	≤2.0/3.0
Efficiency (%)	74.1%
Peak Gain (dBi)	5.53
Impedance (Ohm)	50
Polarisation	Vertical
Max. Input Power (W)	10
Connector Type	SMA Male

## 2. Material and environmental characteristics

External structure	TPEE
Inner structure	Brass
Cable Type	N/A
Connector Type	SMA Male
Dimensions (mm)	30*8.1MM
Antenna color	Black
Operation Temperature	-40 to +80
Storage Temperature	-40 to +80
Antenna Storage life(year)	10
Substance Compliance	ROHS

REV	Date	Description
X1	2023/12/25	New issue

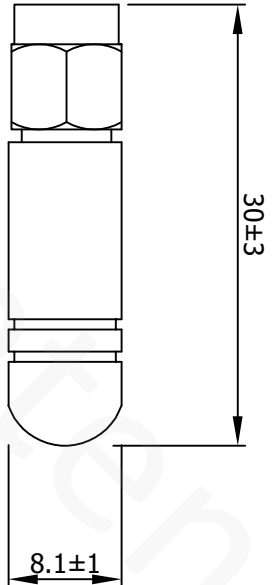

Specification (Free Test):  
 Frequency Range: 2.4-2.5G/5.15-5.85G  
 Impedance:  $50 \Omega$   
 V.S.W.R:  $\leq 2.0/3.0$   
 100% Continuity, short and open circuit test  
 Materials, parts and process must be environmentally (ROHS)

3	Radome	Black TPEE	1	
2	Spring	Brass	1	
1	Connector	SMA male	1	
NO	Name	Description	QTY	Remark
XX.	±5.0	Approved		
X.	±3.0	Customer		
.X	±1.0	Part NO.		
.XX	±0.2	Part name	External antenna	
.XXX	±0.1	CW P/NO.	CW-WZ-0155	
		REV	Unit	File
		X1	m/m	Sheet :
				1/1



## 4. Antenna test parameters


### Antenna Measurement Conditions:

Mounted on Ground Plane of 280 x 80 mm


Measured in Certified 3D Anechoic Chamber

The network analyzer is Agilent 5071c

The comprehensive tester is Agilent cmv500

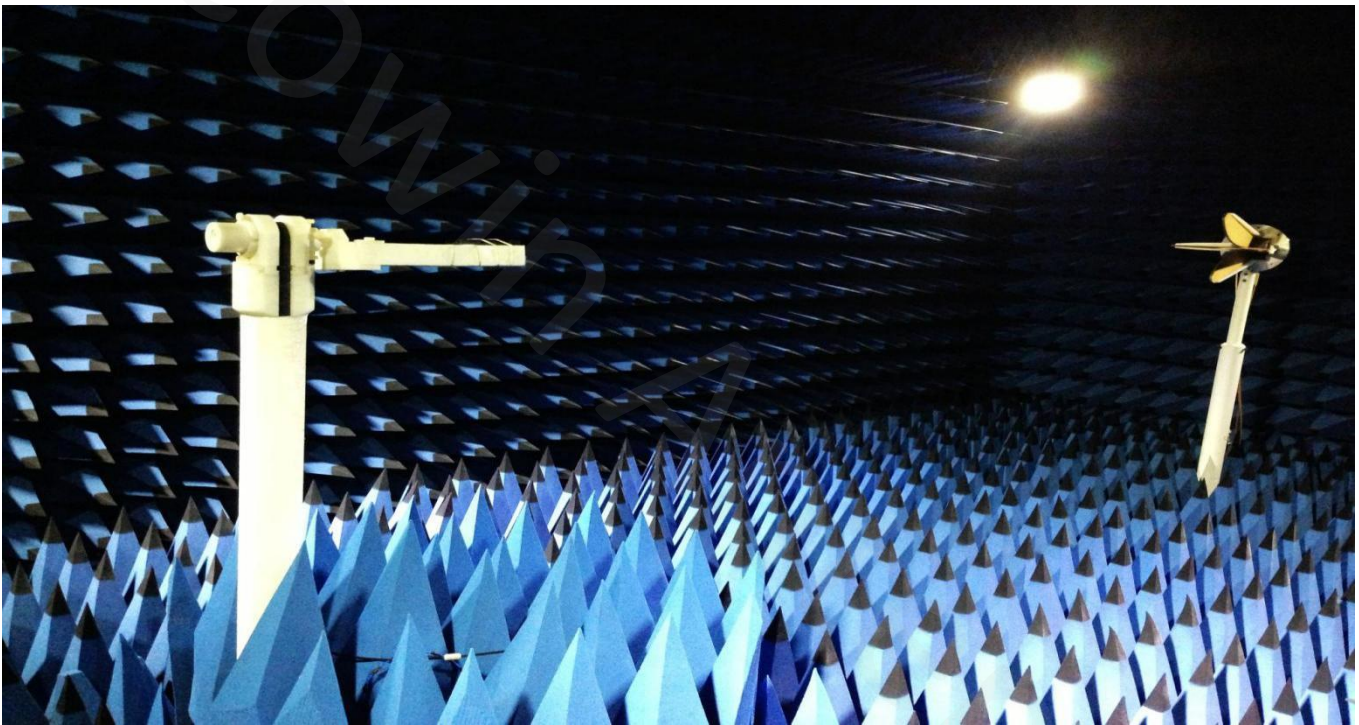


## 4.1 VSWR

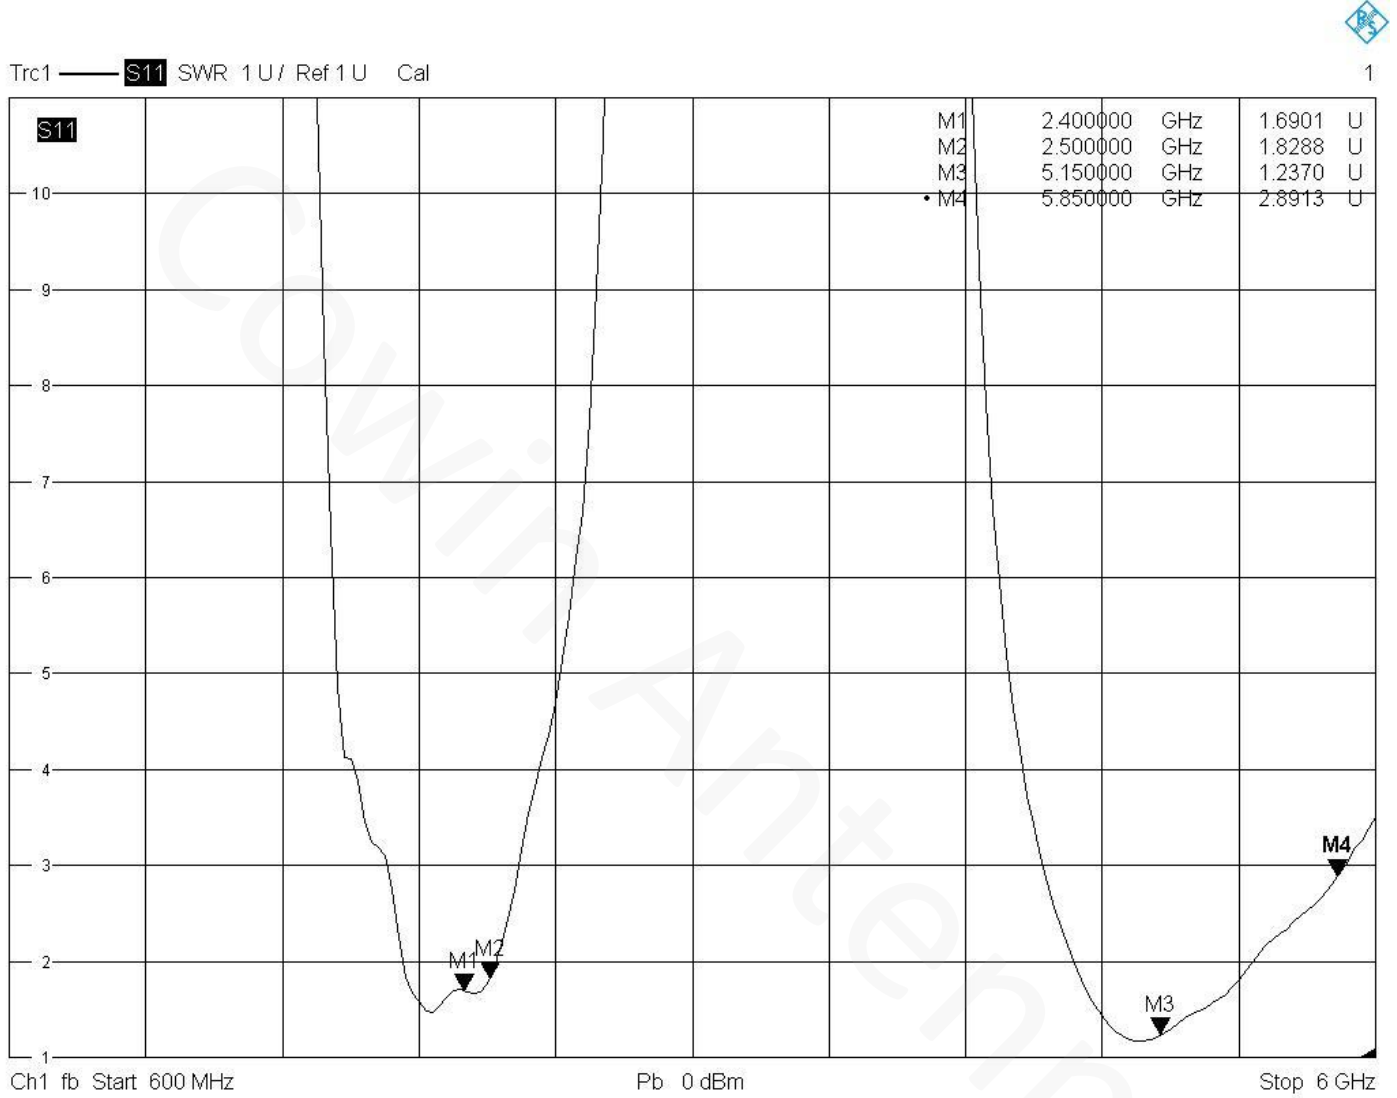


12/20/2023, 9:19 AM

## 4.2 Efficiency

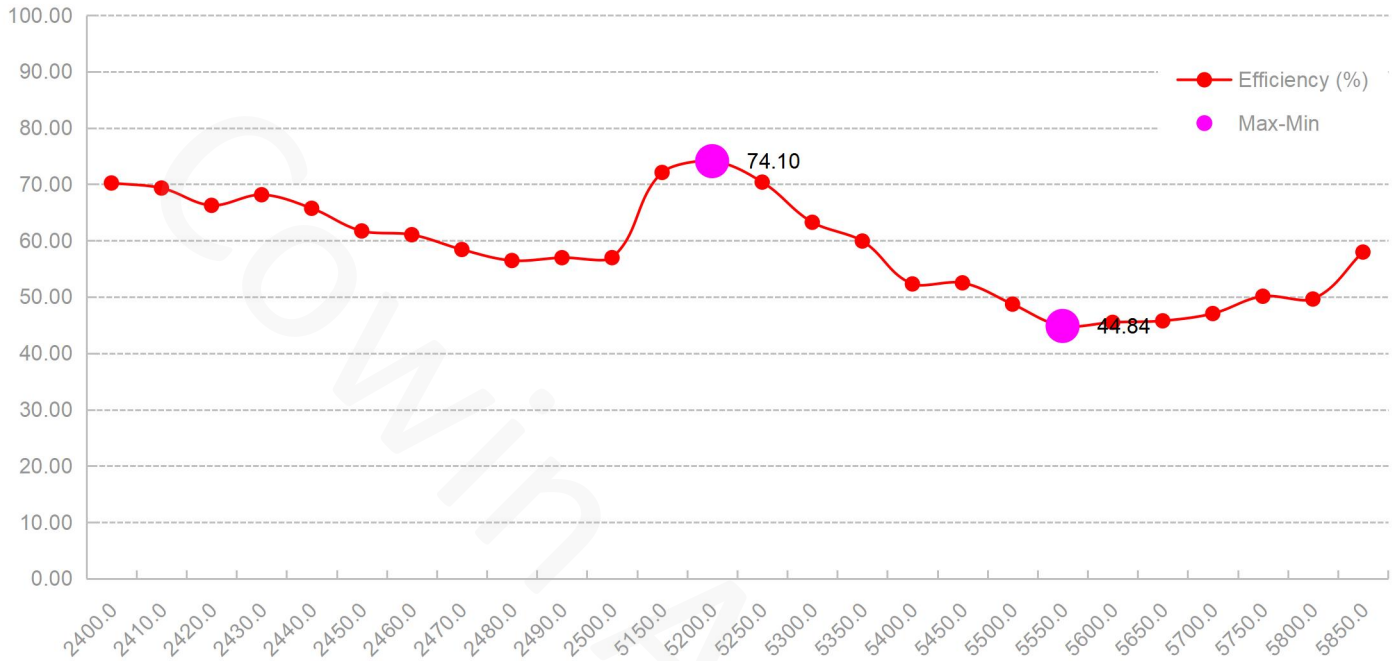


## 4.3 Peak gain

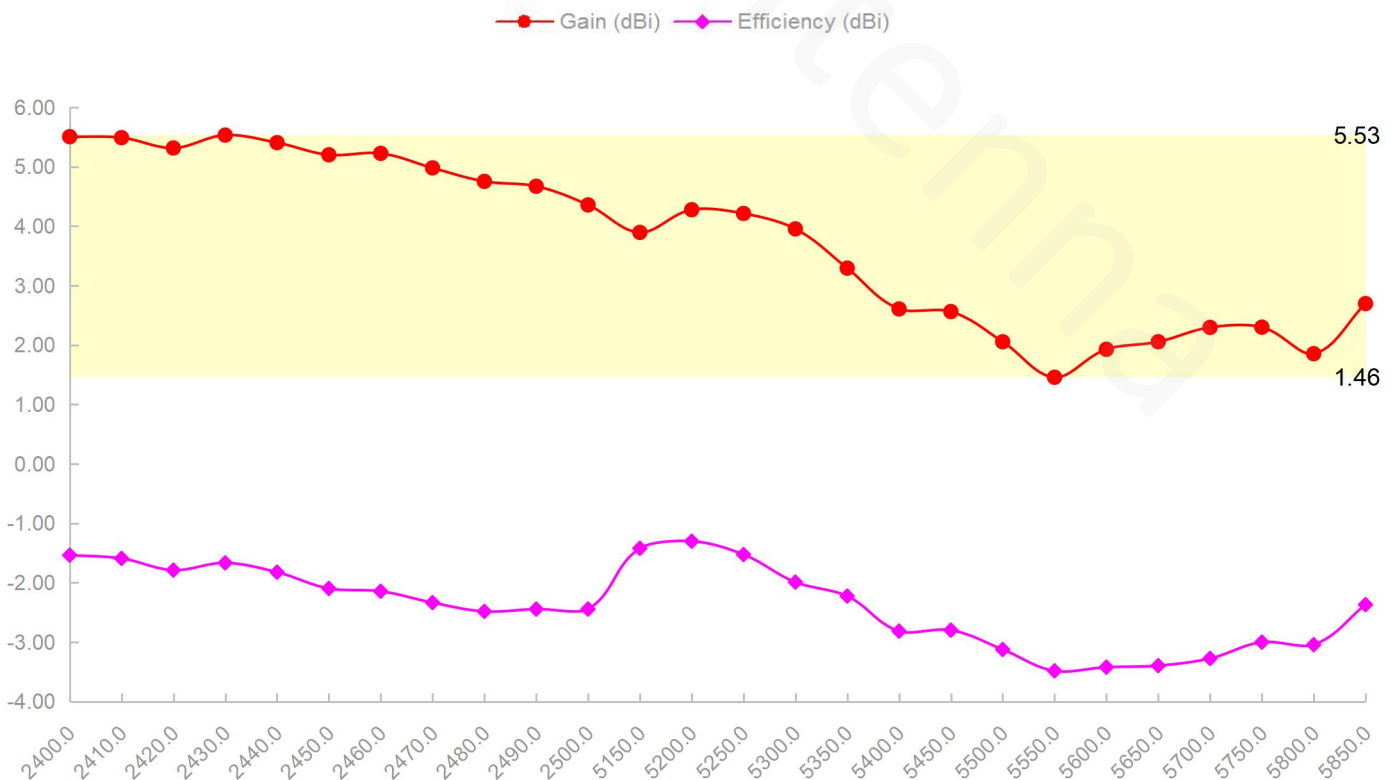





## 4.4 3D&2D Radiation Patterns


2400.0MHz H+V, Eff: 70.2%

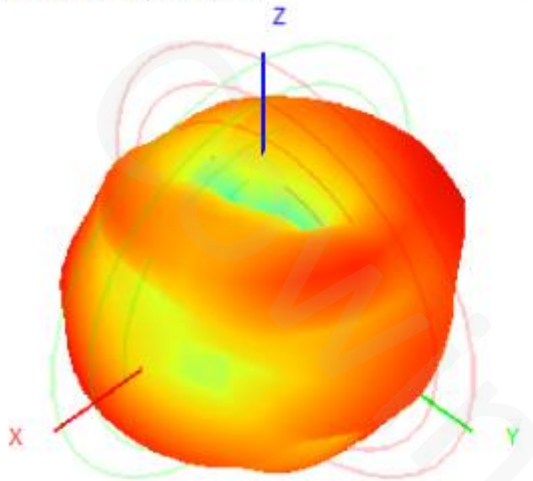


Back View

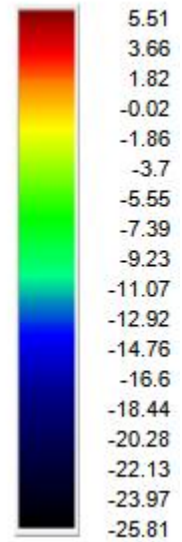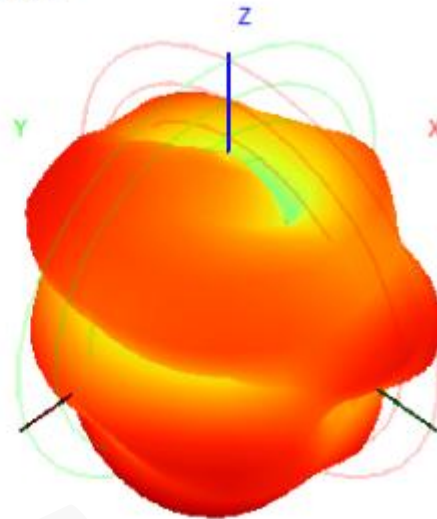


2400.0MHz Total(E1-XZ), Max= 5.06dBi

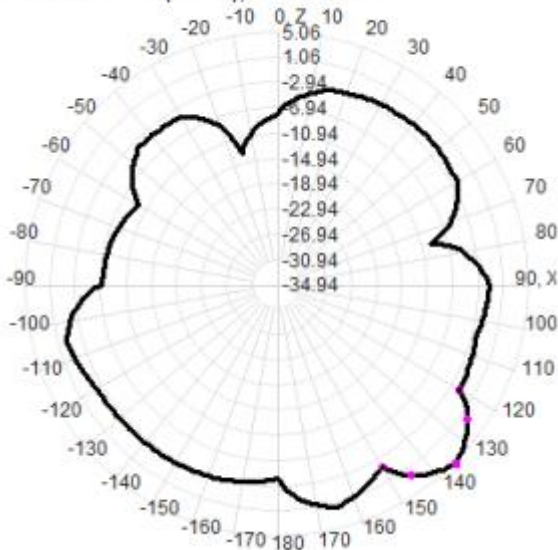



2400.0MHz Total(E2-YZ), Max= 1.32dBi

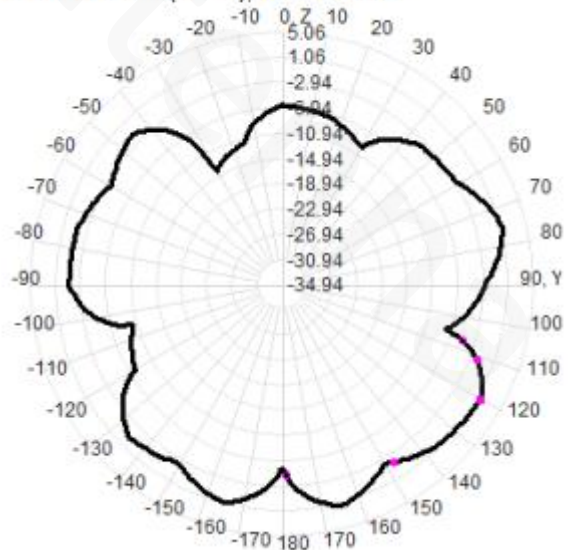


2450.0MHz H+V, Eff: 61.7%

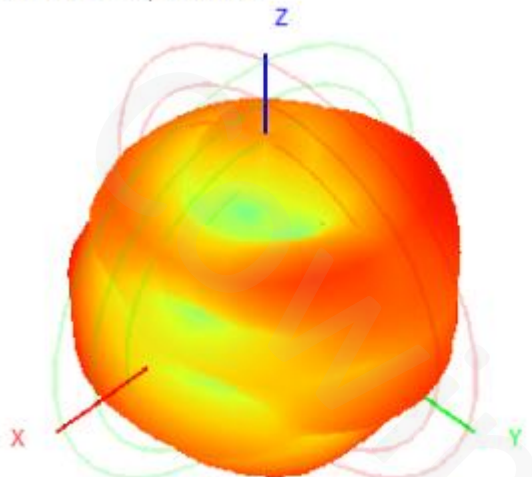


Back View

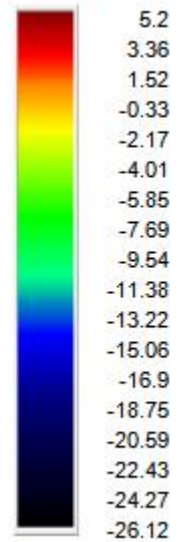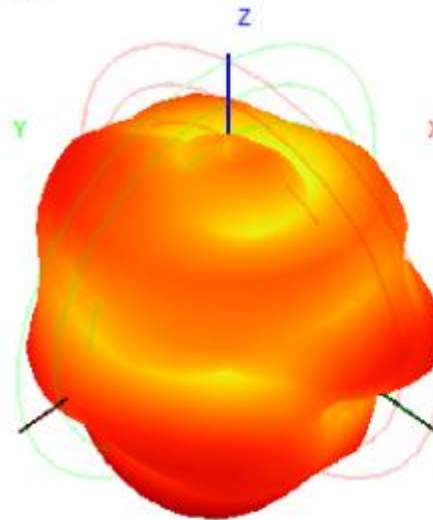

2450.0MHz Total(E1-XZ), Max= 4.48dBi

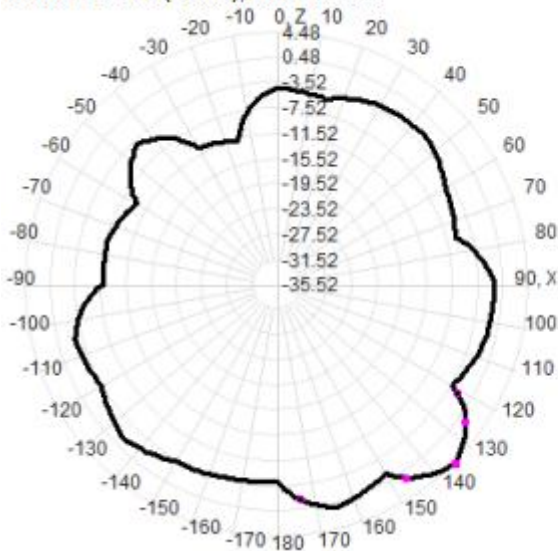


2450.0MHz Total(E2-YZ), Max= 0.77dBi


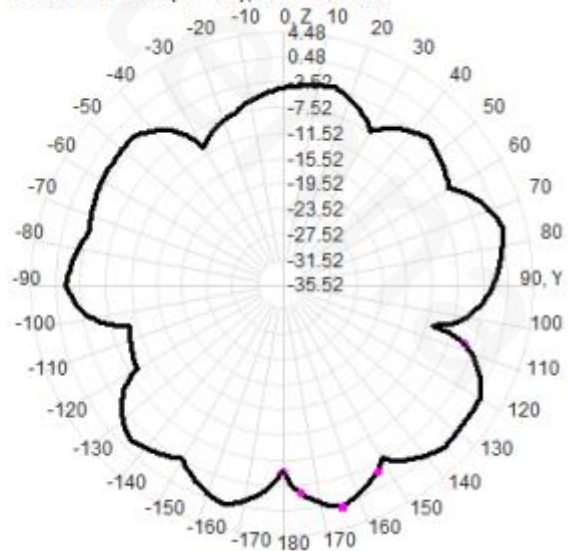





2500.0MHz H+V, Eff: 57.0%

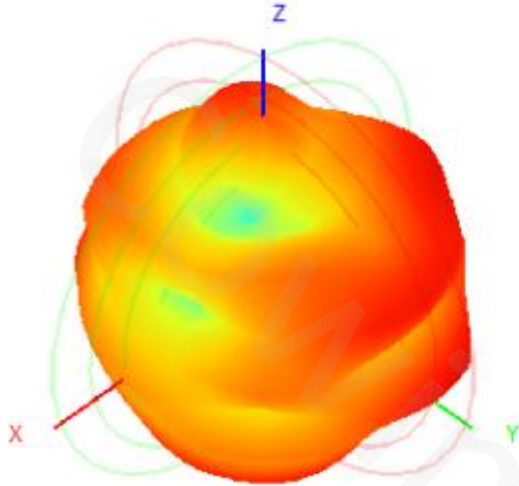


Back View

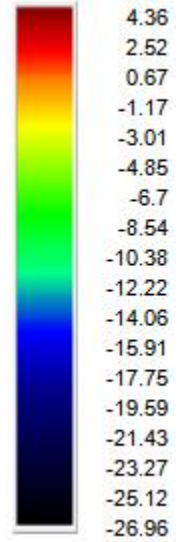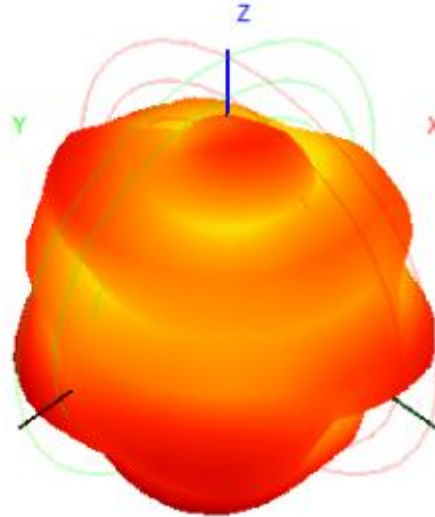


2500.0MHz Total(E1-XZ), Max= 3.66dBi

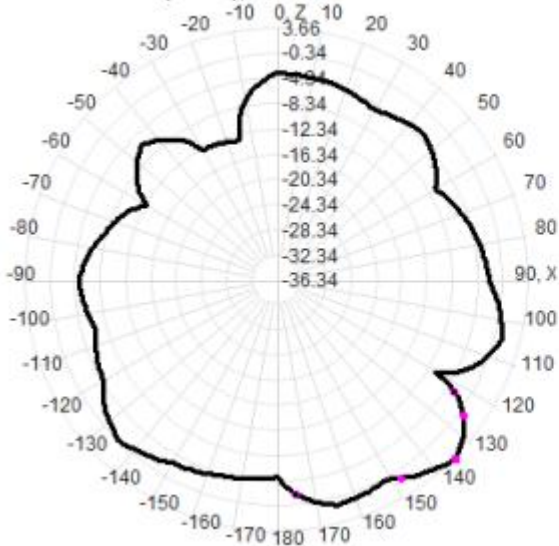



2500.0MHz Total(E2-YZ), Max= 0.50dBi

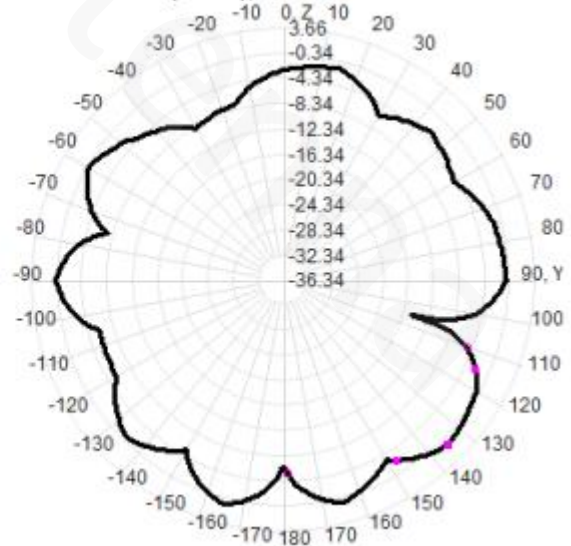


5150.0MHz H+V, Eff: 72.1%

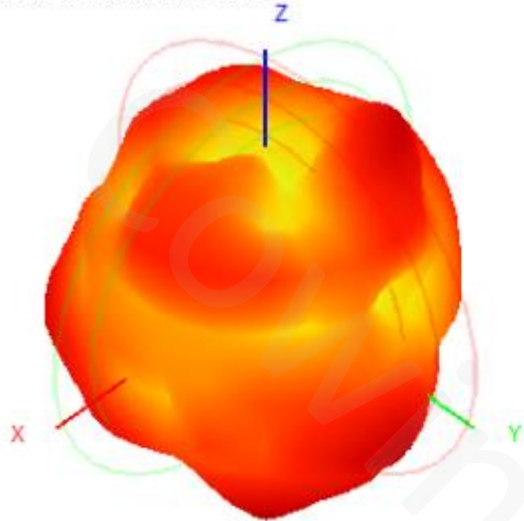


Back View

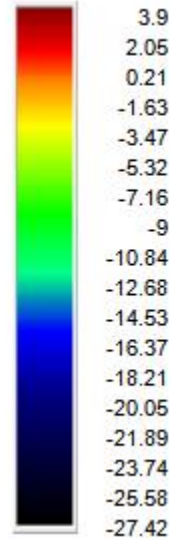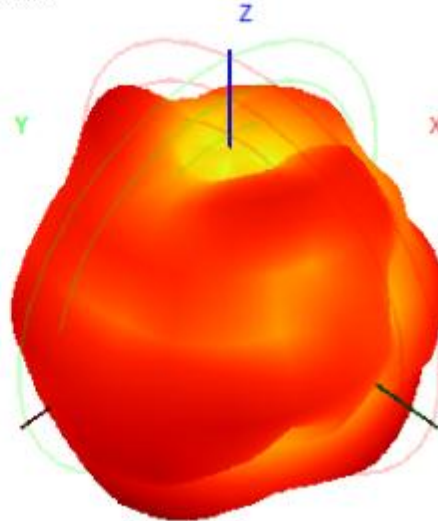


5150.0MHz Total(E1-XZ), Max= 2.59dBi

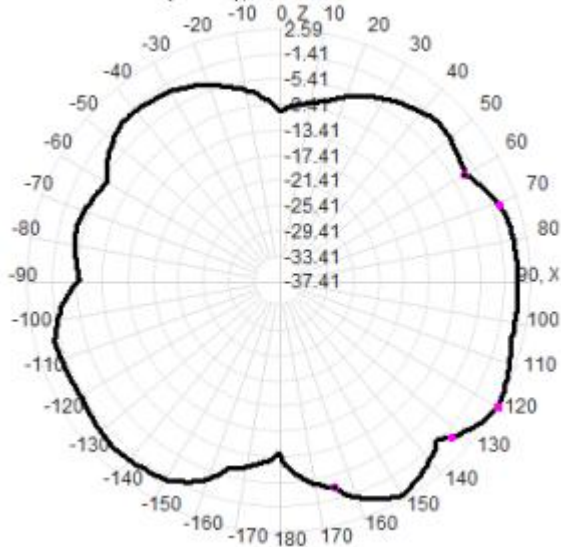



5150.0MHz Total(E2-YZ), Max= 2.59dBi

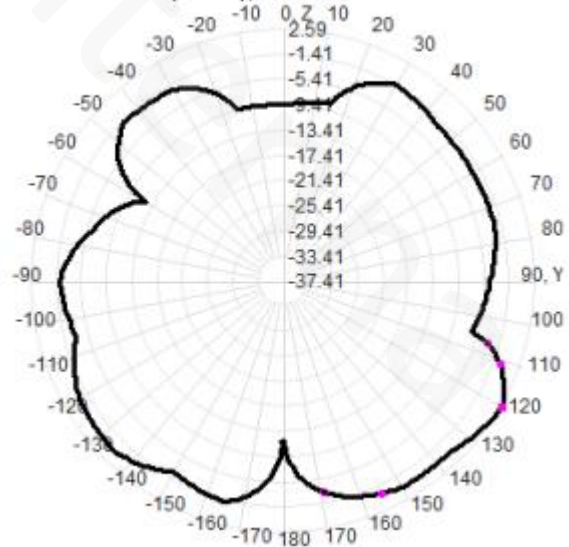


5450.0MHz H+V, Eff: 52.5%

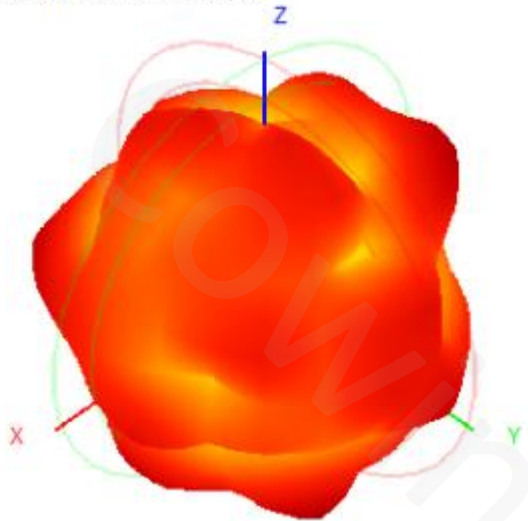


Back View

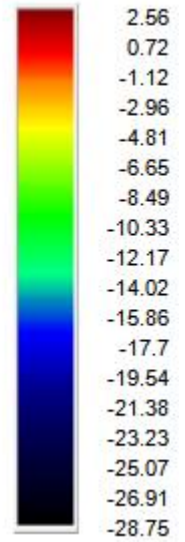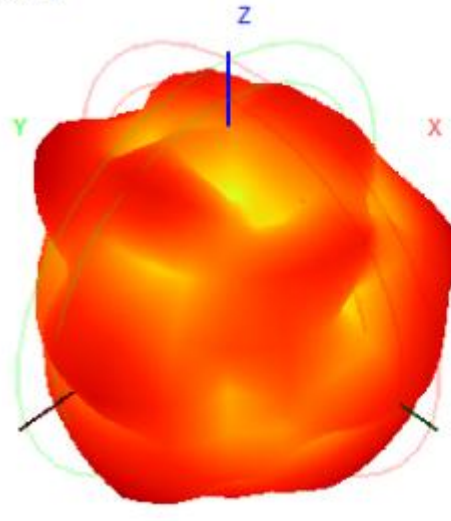


5450.0MHz Total(E1-XZ), Max= 0.73dBi

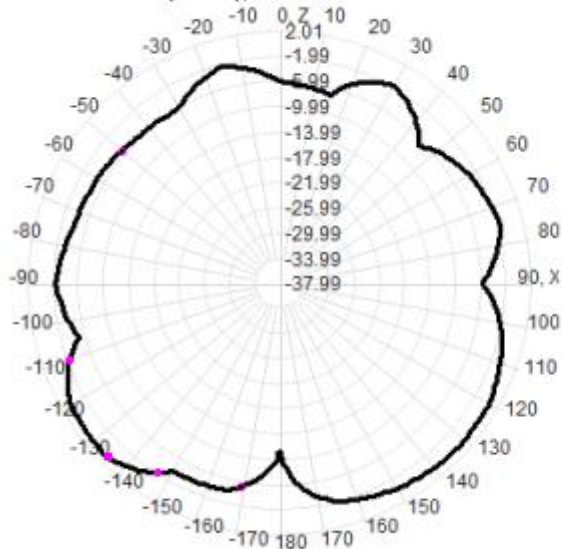



5450.0MHz Total(E2-YZ), Max= 2.01dBi

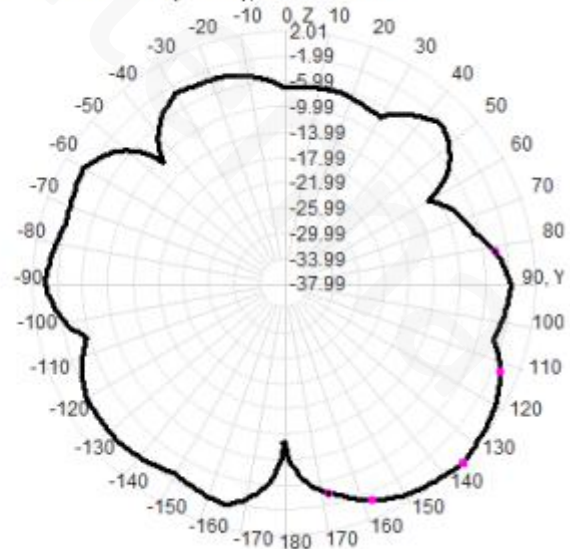


5850.0MHz H+V, Eff: 58.0%

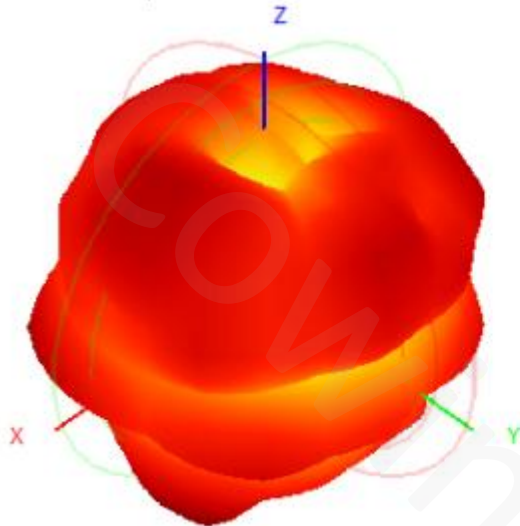

Back View

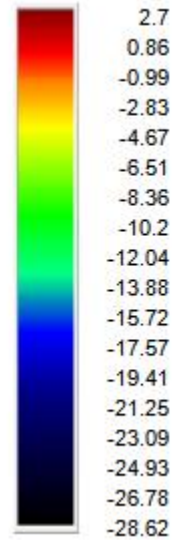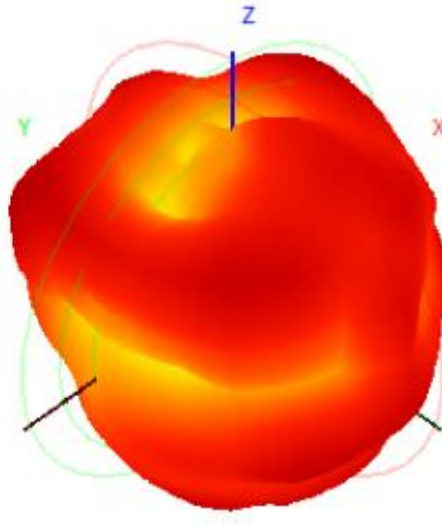

5850.0MHz Total(E1-XZ), Max= 0.80dBi

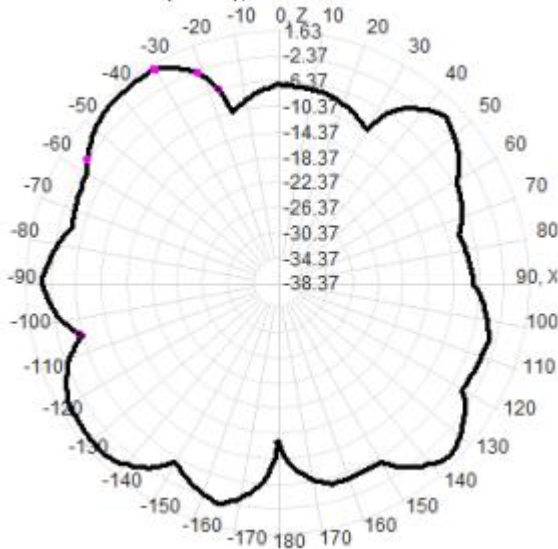

5850.0MHz Total(E2-YZ), Max= 0.44dBi

